


Central Tube FvTST

30 PAIR TELECOM CABLE, PE INSULATED, ARMOURED, OUTER PVC SHEATH

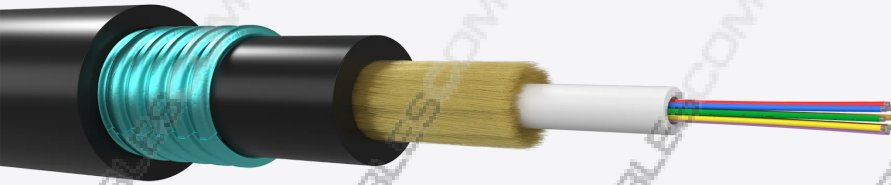

Description and application

"Loose Tube" type fibre-optic cables with fibreglass yarns, longitudinal corrugated steel tape and a double LSZH thermoplastic sheath.

1/0/1900

Construction

- Optical fibres.
- Jelly-filled PBT central tube
- Fibreglass yarns.
- LSZH thermoplastic inner sheath.
- Corrugated copolymer-coated steel tape longitudinally applied with overlap.
- LSZH thermoplastic outer sheath.
- Markings:
 - CABLESCOM / Year / Number of fibres / Type of fibre / Type of sheath / Length markings

MODULARITY 12 FO / TUBE

FO No.	2	4	6	8	12	16	24
No. Micromodules/Tubes	1	1	1	1	1	1	1
Weight (kg/km)	151	151	151	151	151	167	167
Nominal OD (mm)	11,7	11,7	11,7	11,7	11,7	12,4	12,4
Maximum tensile strength MAT (N)	1200 N						
	(εf<0.2%)						
Impact resistance	5 J						
	300 mm, 3 impactos, Δα<0.05 dB						
Curvature	D=20 x Ø cable, Δα<0.05 dB						
Crush resistance	3000 N, 10 cm						
Thermal cycle	-20°C / 60°C, Δα<0.05 dB						
Water penetration	LPagua ≤ 3 m (24 horas)						
Jacket Thickness / FRP Diam (mm)							